

# 65 inch outdoor vertical digital signage

--Android version

## Tech specification

### Catalogue

|                                   |   |
|-----------------------------------|---|
| Product Description.....          | 2 |
| Display parameter .....           | 2 |
| Touch parameters (Optional) ..... | 3 |
| System configuration.....         | 3 |
| System Function.....              | 3 |
| Software function.....            | 4 |
| Machine parameter.....            | 4 |
| Electrical features.....          | 5 |
| Packing list .....                | 5 |
| Diagram .....                     | 5 |

| version         | drawing    | audit |
|-----------------|------------|-------|
| 65-Android-13.0 |            |       |
| Revised date    | 2025-03-18 |       |



## Product Description

- ◆ Suitable for all outdoor environments, with features such as waterproof, dustproof, moisture-proof, explosion-proof, anti-theft, lightning protection, high-definition and high-brightness, leakage protection, etc.
- ◆ The brightness can be automatically adjusted according to the environment to reduce light pollution.
- ◆ Can set timer on and off by day, week, month.
- ◆ **Intelligent temperature control system:** can automatically adjust the heat dissipation effect of the equipment according to the internal temperature of the equipment.
- ◆ **Structural design:** the shell is made of 1.0-2.5mm high-quality galvanized sheet, sprayed with outdoor special powder, and the outdoor anti-corrosion is more than 7 years.
- ◆ **Waterproof design:** the shell structure is designed with waterproof groove and waterproof labyrinth of air inlet and outlet holes, meeting the protection level of IP65.
- ◆ **Dustproof design:** The air inlet and outlet are designed with special dust-proof filter (medium and high efficiency dust-proof filter) to filter the fine dust in the air and prevent mosquitoes from entering the device.
- ◆ **Anti riot glass:** 6mm high permeability fully tempered glass is used as the protective tempered glass in front of the screen of the whole machine, with the light transmission coefficient > 95%.
- ◆ **Anti theft design:** equipped with anti-theft door lock (padlock can be added, double anti-theft) to truly achieve anti-theft security. The fixing method is to fix the bottom expansion screw or embedded parts.
- ◆ High brightness, with air cooling system, and multi split screen display mode.

## Display parameter

|                |                                |
|----------------|--------------------------------|
| Brand          | MITHOS                         |
| Model          | EBAD65E                        |
| Screen Size    | 65inch                         |
| Resolution     | 1920*1080/3840*2160 (Optional) |
| Angle of view  | 178°/178°                      |
| Contrast ratio | 3500: 1                        |
| Display size   | 803(H) x1428(V)mm              |
| Display rate   | 16:9                           |
| Back light     | LED                            |
| Brightness     | ≥2500cd/m <sup>2</sup>         |
| Refresh rate   | 60HZ                           |
| Color          | 16.7M(8-bit)                   |
| Response time  | 6ms                            |

|                      |                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------|
| Life span            | 50000h                                                                                        |
| Smart photosensitive | The intensity of outdoor light automatically adjusts the brightness of the LCD display screen |

#### Touch parameters (Optional)

|                |                     |
|----------------|---------------------|
| Technology     | Capacitive touch    |
| Touch point    | 20 points           |
| Touch mode     | Finger or touch pen |
| Touch accuracy | ≤ 2mm               |
| Service life   | 60 Million touch    |
| Drive mode     | Driver-free         |
| Camera         | 500MP               |

#### System configuration

|                  |                                                 |
|------------------|-------------------------------------------------|
| Operation system | Android                                         |
| Version          | 13.0                                            |
| CPU              | T972 Quad core A55, Main frequency up to 1.9GHz |
| GPU              | Mali-G31                                        |
| RAM              | 2GB                                             |
| Storage memory   | 16GB                                            |
| Interface        | HDMI*1(2.1 4kx2k@60Hz input) USB*2              |
| Audio interface  | 3.5mm ear jack*1                                |
| Network          | 1pc, 10M/100M Adaptive Ethernet                 |
| WIFI、BT          | Built in WIFI (2.4G single-signal) , BT4.2      |
| 3G/4G            | Choose to install                               |

#### System Function

|                      |                                                     |
|----------------------|-----------------------------------------------------|
| Decoding Capability  | Supports 4K video and picture decoding and playback |
| Software application | Support to install the third-party software         |
| Language             | Italian,、 English etc language                      |
| Boot Animation       | Optional : Support to customize                     |

|                         |                                                                          |
|-------------------------|--------------------------------------------------------------------------|
| Infrared remote control | Operate system by remote control                                         |
| Audio function          | Support left/right channel output,built-in double 8Ω/15W power amplifier |
| Power-on/off            | Remote control/timing/network wake-up/self-start                         |
| System authorization    | Allow root permission and customize software development                 |
| Mouse mode              | support wired/wireless mouse or use keyboard                             |
| System update           | Support local and remote upgrade                                         |
| Play mode               | Audio: MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP etc                     |
|                         | Picture: JPG、BMP、PNG etc                                                 |
|                         | Video: AVI, rm, rmvb, MKV, WMV, MOV, MP4 etc                             |
| Typing                  | Standard Android keyboard as default,can install the third party typing  |
| More functions          | follow instruction manual/video or contact supplier                      |

#### Software function

|                         |                                                                               |
|-------------------------|-------------------------------------------------------------------------------|
| Background support      | Web/mobile IE (local network/WAN)                                             |
| Play mode               | Networking/standalone                                                         |
| Play support            | video、picture、subtitles、PPT、web、weather、clock etc mixture to play             |
| Smart splicing          | support custom playing modes to splice as setting                             |
| Timing function         | support to set playing custom program in time period                          |
| Terminal administration | Administrator can create and modify account for level-to level administration |
| More function           | follow instruction manual/video or contact supplier                           |

#### Machine parameter

|                   |                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------|
| Color             | black white                                                                                |
| Body Material     | Using 1.2-2.5mmSGCC high-quality galvanized steel plate                                    |
| Protection grade  | IP65                                                                                       |
| Protective glass  | 6mm explosion-proof glass (AG anti-glare/AR anti-ultraviolet optional)                     |
| Cooling by design | Intelligent direct ventilation (forced air cooling) heat dissipation system                |
| Energy saving     | Intelligent temperature control cooling system automatically adjusts wind speed and volume |
| dust proof        | High-precision filtration system blocks 99% of dust particles                              |

|                  |                                           |
|------------------|-------------------------------------------|
| Product size     | 940*2100*135mm(with base)                 |
| Base size        | 940*500*60mm                              |
| Packing size     | 2180*250*1080mm                           |
| Bracket          | Universal for horizontal/vertical hanging |
| Packing material | Carton                                    |
| Net/gross weight | 115KG/117KG                               |
| Install ways     | mount-on wall/embedding/hang/bracket      |


#### Electrical features

|                           |                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------|
| Scenarios                 | outdoor                                                                                  |
| Rated Voltage             | AC110-220V                                                                               |
| Rated power               | ≅ 100W-450W                                                                              |
| Suitable Environment      | -20℃ to +55℃ outdoor environment operation                                               |
| Time switch               | Support 16 groups of timed on/off, repeatable settings, timed on/off by day, week, month |
| Lightning protection      | Level 3                                                                                  |
| Leakage protection switch | Disconnect the circuit promptly when leakage occurs                                      |

#### Packing List

|                                         |     |
|-----------------------------------------|-----|
| 65inch outdoor vertical digital signage | 1pc |
| Power cable                             | 1pc |
| Remote control                          | 1pc |
| WiFi antenna                            | 1pc |
| Warranty card                           | 1pc |

## Diagram

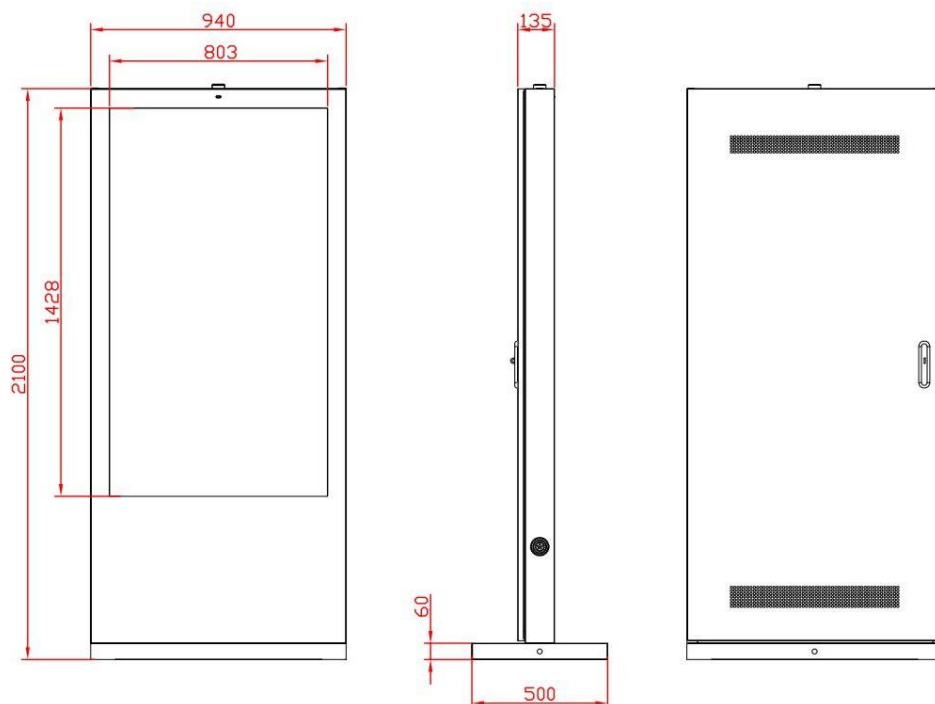

HD display



Intelligent split screen



Link WiFi



Remote management

**178°**

Super wide Angle



Loop play



Timing switch



Usb flash drive import